


No. 62BP

Instructions:

1. Turn off water supply.
2. Detach bead chain and remove old assembly.
3. Secure tank ball to bracket by tightening the tank ball screw.
4. Snap on new assembly.
5. Fasten bead chain onto lift arm by snapping into place.
There should be a minimum amount of slack.
6. Turn on water supply.

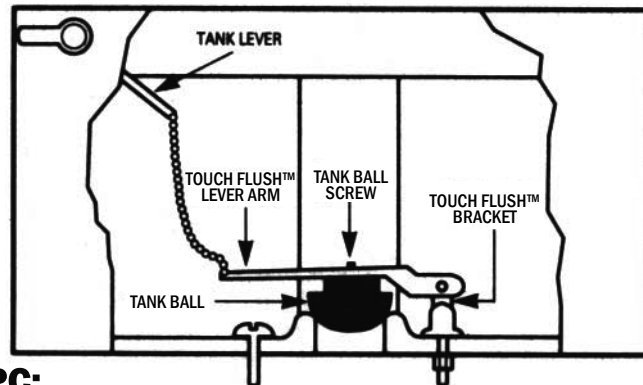

UPC:
049057006290

Touch Flush™ is a registered trademark of Eljer®